




Smoothing machine TL

Technical data

Smoothing machine TL

Height	min. 800 mm – max. 1100 mm
Smoothing plate Ø	600 mm
Speed drive shaft	125 rpm
Engine	1,1 kW at 125 rpm 230 V AC, 50 Hz
Sound pressure level	68 dB(A)
Power supply	CEE standard coupling, 16 A
Total weight	42 kg (36 kg without smoothing plate)


- For smoothing and compacting composite and special screeds, concrete surfaces and industrial floors
- The use of the machine eliminates the laborious manual smoothing, which saves time and reduces physical strain many times over.
- With 4 wing nuts you can quickly and flexibly replace the smoothing plates.

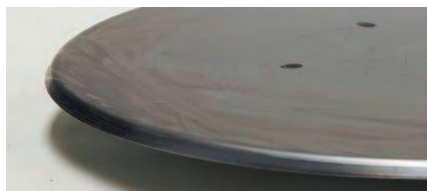

H2809741847 Smoothing plate Standard
(included in the scope of delivery of a new machine)




664255 Smoothing plate with 90° edge

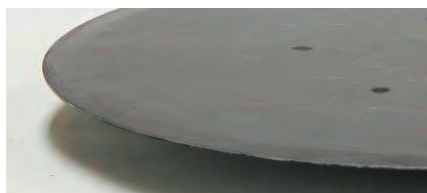

H2809741846 Smoothing plate flat



655127 Smoothing plate with bevel

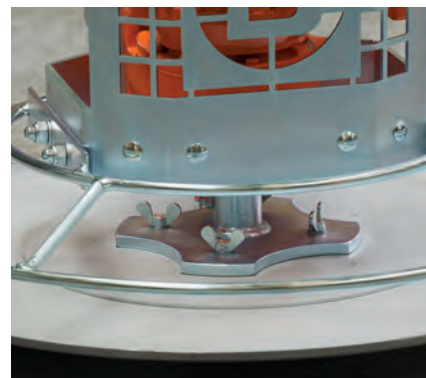

Quickly unscrew the wing nuts and use a new smoothing plate.

BRINKMANN

A brand of the Putzmeister Group

Max-Eyth-Straße 10 · 72631 Aichtal / Germany

Tel. +49 (7127) 599-0 · Fax +49 (7127) 599-743

info@estrichboy.de · www.estrichboy.de



BRINKMANN